




Huawei P8 Lite Earpiece Speaker Replacement

This guide will explain how to replace the Earpiece Speaker for the Huawei P8 Lite.

Written By: Adam Jansen

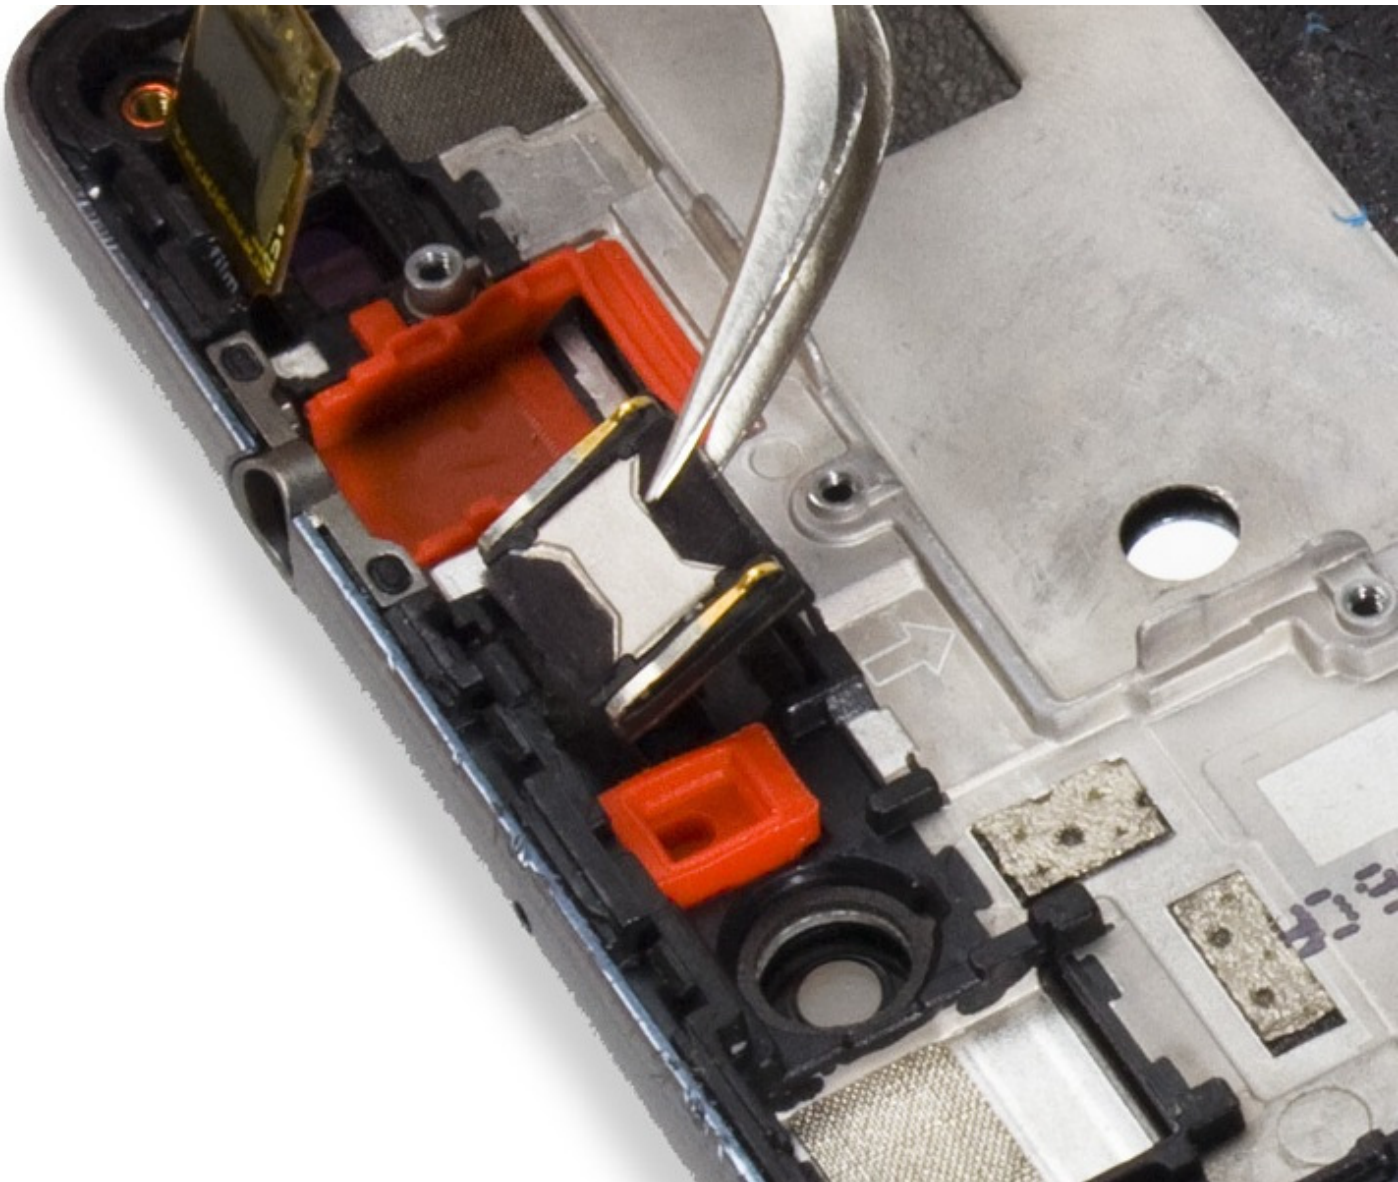


INTRODUCTION

This guide will explain how to replace the Earpiece Speaker for the Huawei P8 Lite.

TOOLS:


- [54 Bit Driver Kit](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Loudspeaker

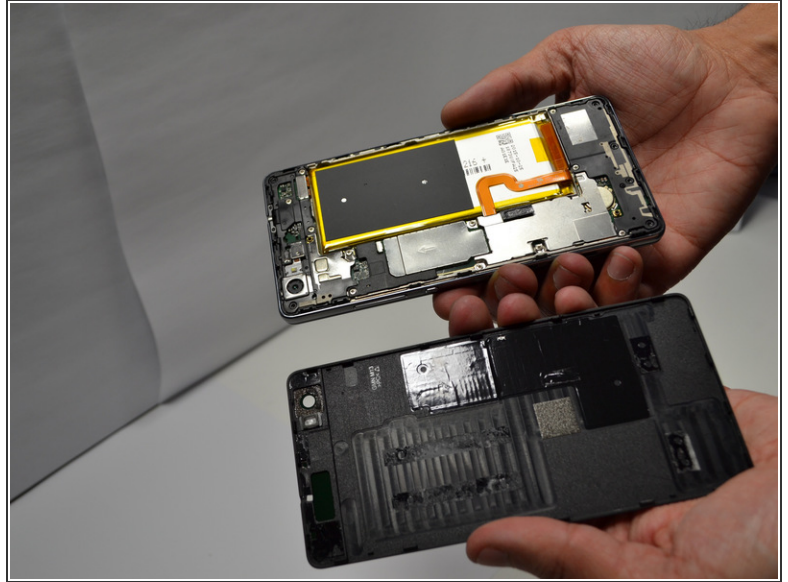



- Begin by removing the back cover of the device with the [Spudger](#). To prevent damage to the back cover, begin removing the cover half an inch to the right of the headphone jack and continue prying around the perimeter of the device.

Step 2

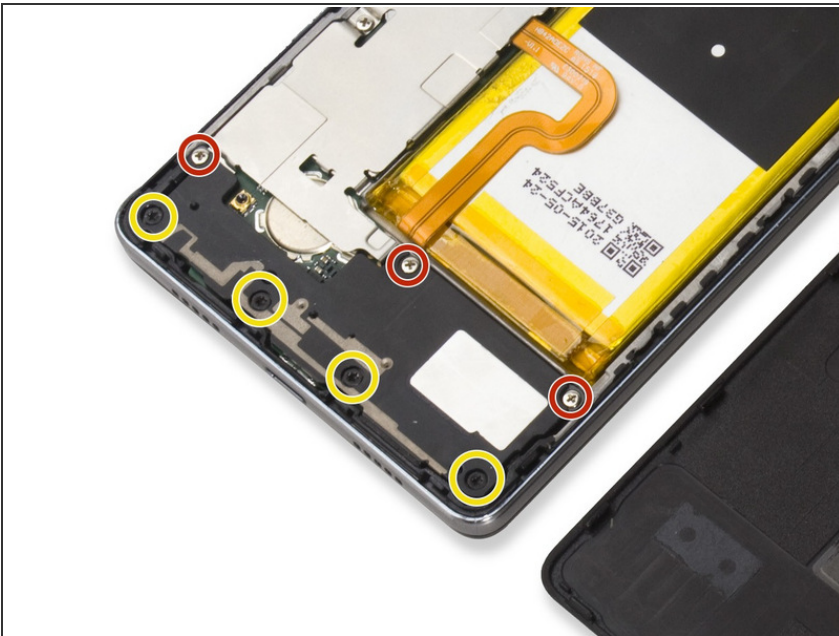

- Locate the Loudspeaker at the bottom of the device.
- Remove the four black screws using the [T5 Torx Screwdriver](#).
- Then use the [Phillips #000 Screwdriver](#) to remove the three silver screws.

Step 3

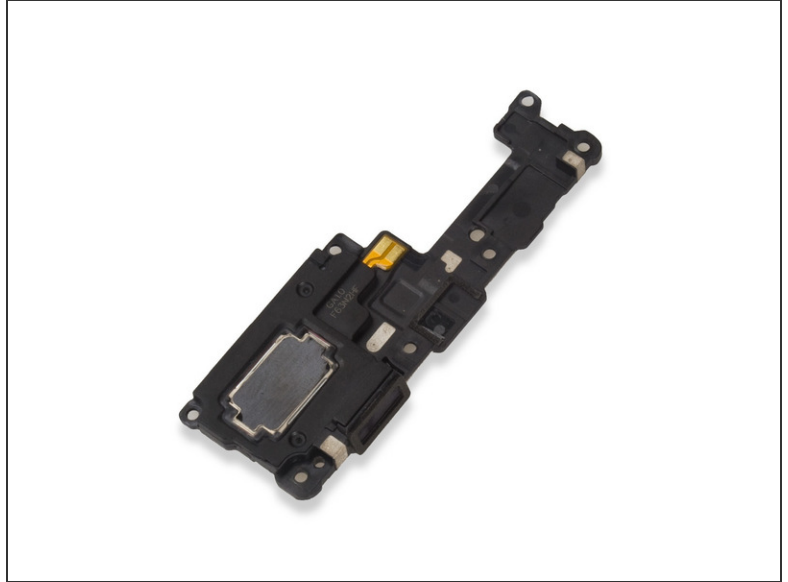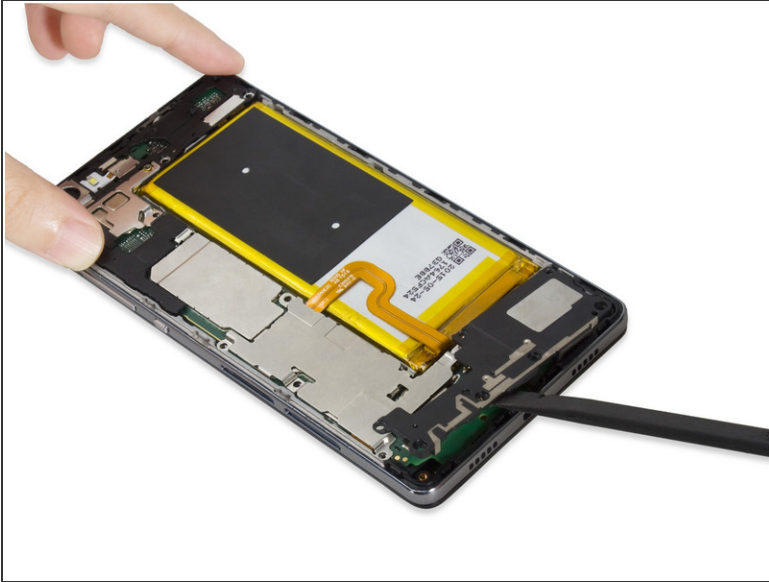


- Use the [Spudger](#) to gently remove the Loudspeaker from the device. Place the replacement Loudspeaker into the device.

Step 4 — Battery



- Locate the adhesive strip underneath the battery. Gently pull on the strip to loosen it enough to remove the battery from the device.

Step 5

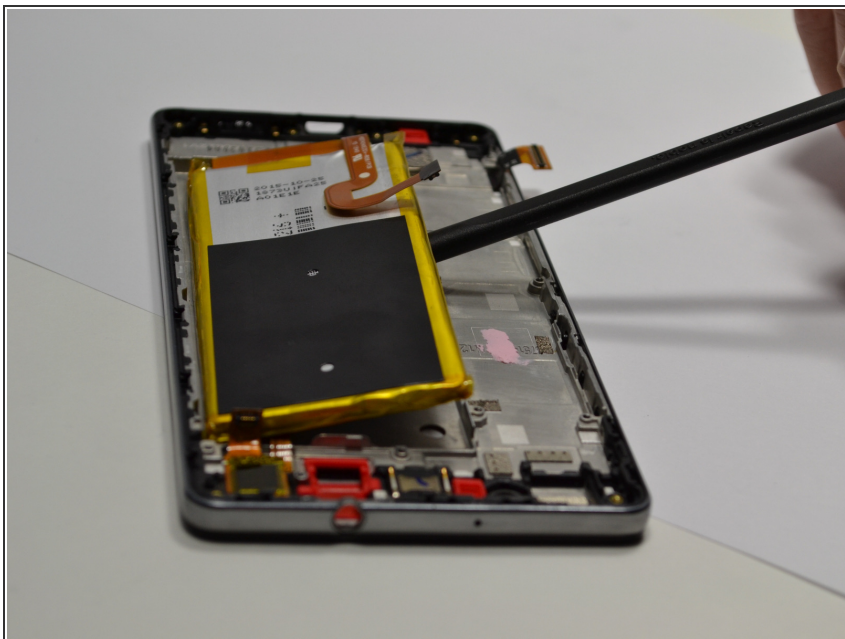



- Use the [Spudger](#) to gently remove the battery. Then insert the replacement battery.

Step 6 — Motherboard




- Continue by removing the SIM slots on the side of the device with the [Spudger](#).

Step 7

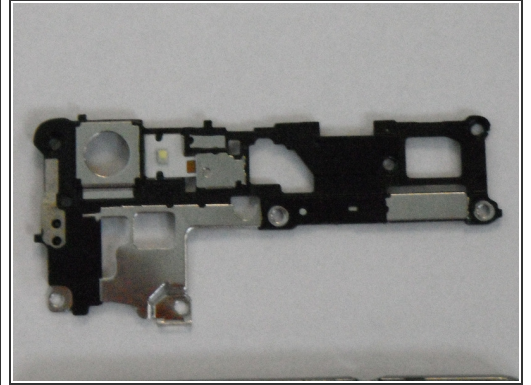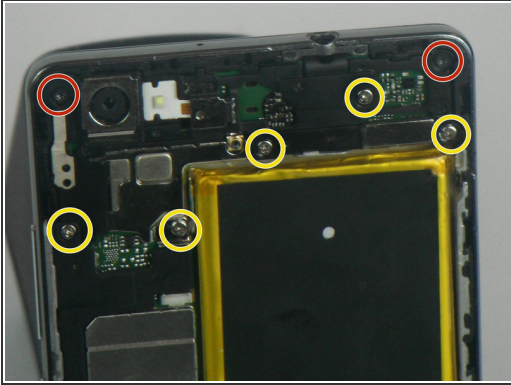


- Using the [Phillips #000 Screwdriver](#) remove the five silver screws from the black and silver plate near the top of the device.
- Using the [T5 Torx Screwdriver](#), remove the remaining two black screws.
- Remove the securing brackets covering the motherboard.

Step 8

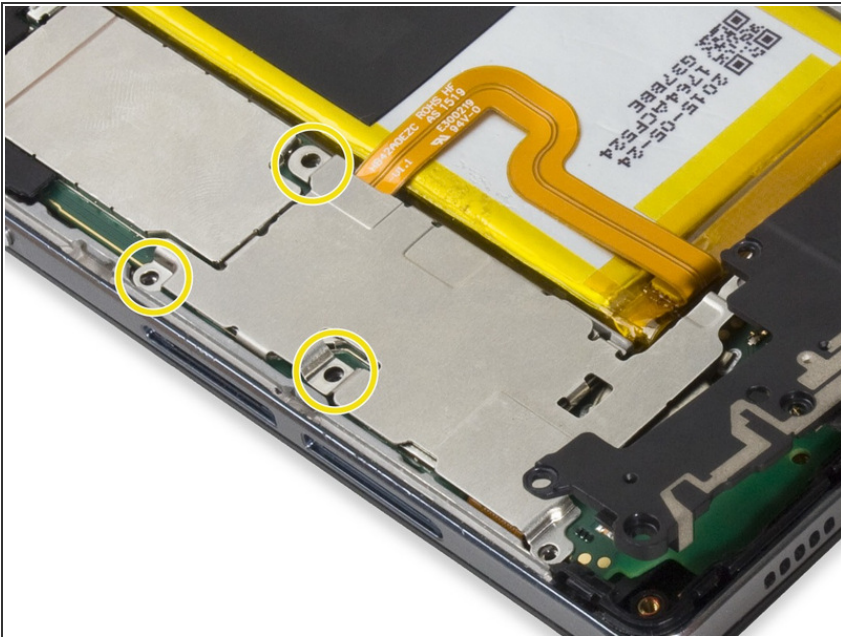


- Use the [Phillips #000 Screwdriver](#) to remove the three remaining silver screws on the silver panel.

Step 9

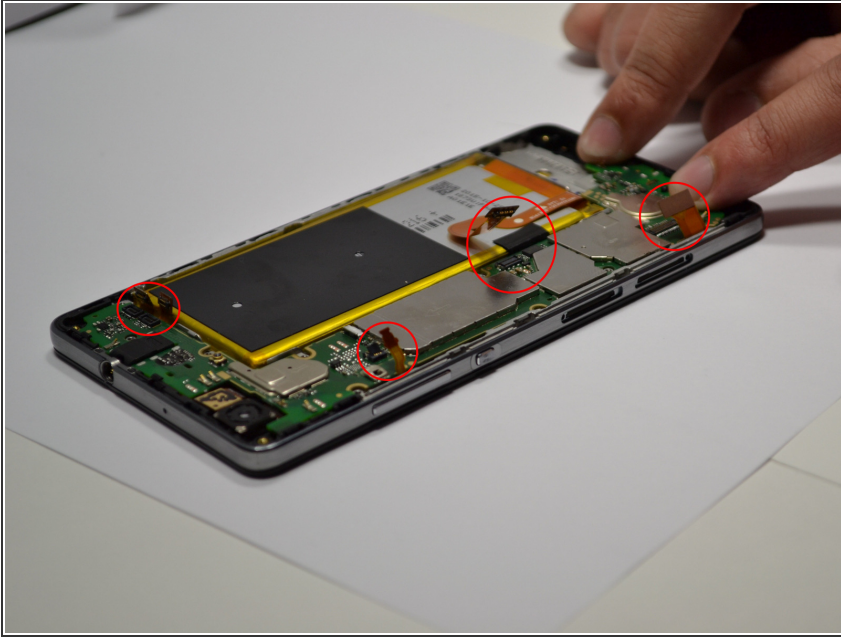



- Carefully separate the four connectors holding the motherboard in place.

Step 10

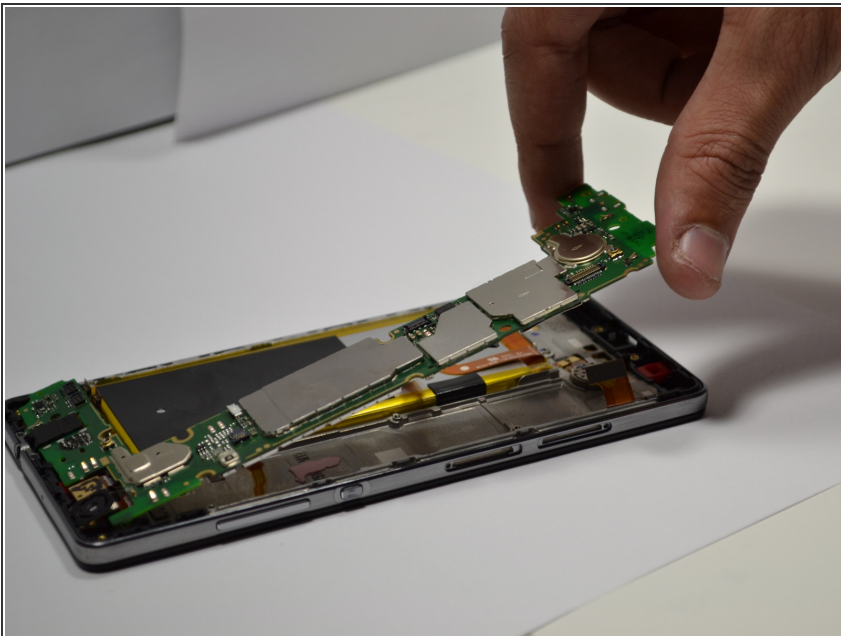

- Remove the motherboard from the device. Then insert the replacement motherboard.

Step 11 — Earpiece Speaker

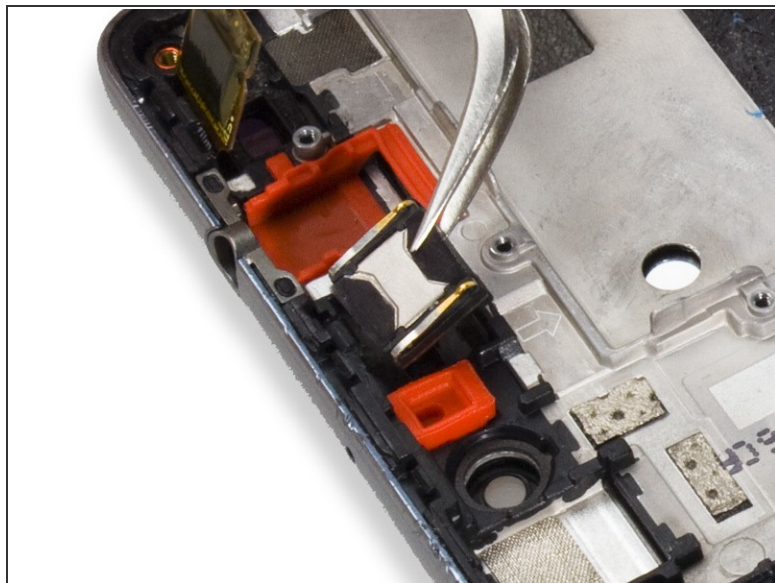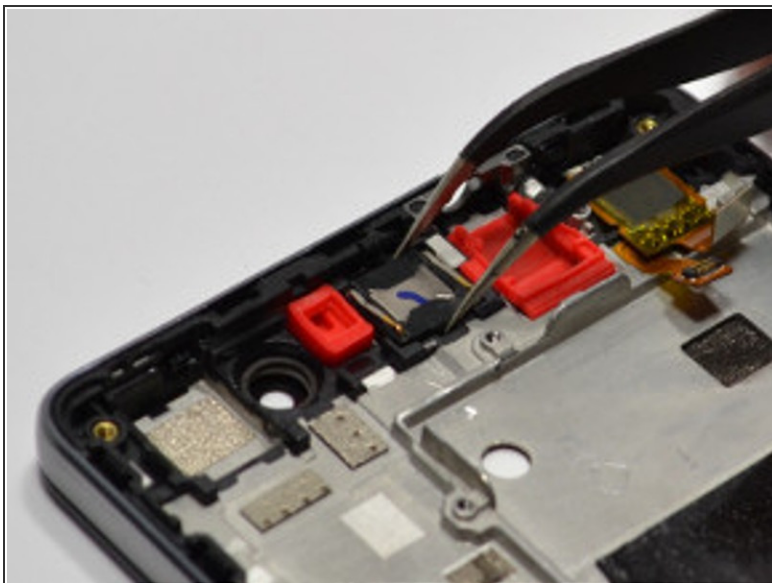

- Using the [Tweezers](#), carefully remove the Earpiece Speaker.
- Insert the new Earpiece Speaker and follow these steps in reverse order to reassemble the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-05 08:34:10 AM.